



2835B Pan American Fwy NE  
 Albuquerque, New Mexico 87107  
 Tel: (505) 842-8007  
 Fax: (505) 842-0366  
 www.ferrodevices.com  
 radiant@ferrodevices.com



## Premier II Specifications include

- »  $\pm 10V, 30V, 100V, 200V$  and  $500V$  built in output (10kV option)
- » 16-bit Arbitrary Waveform Generator output
- » 18-bit resolution with 2MHz single pass capture rate
- » Executes Pulse Test at 500ns
- » 32,000 Max Data Points
- » Measures 200fC of charge in a single, 1 second pass
- » 2 COMM channels for controlling high voltage amplifiers.
- » 2 external 18-bit,  $\pm 10V$  SENSOR voltage inputs.


# Premier II Ferroelectric Test System

**The Precision Premier II, is one of Radiant's most advanced testers. The Premier II offers one of the largest test envelopes in terms of frequency response, voltage range, and accuracy of any ferroelectric tester in the world.**

- The Precision Premier II tester is capable of executing a single pass hysteresis loop in  $100\mu s$  with no interlacing of the data acquisition. The Premier II uses a 40MHz clock through a down counter resulting in an effective maximum clock rate of 10MHz. The capture rate for the 18bit ADCs in the system is 2MHz. The maximum hysteresis frequency of the Premier II is 250kHz .
- The driver for the Premier II interlaces multiple loops to generate an effective capture rate of 10MHz on hysteresis and a total loop period of  $10\mu s$ . This hysteresis measurement is compatible with the loops measured by all of the Precision testers made by Radiant. The Premier II will execute a PUND pulse measurement with pulse widths ranging from  $0.5\mu s$  up to 1s on capacitors with areas ranging from  $0.5u2$  up to multiple square centimeters.

### Includes Vision Software Operating System

- **The Premier II Ferroelectric Test System is driven by Vision Software. Vision offers 155Tasks in Total. Vision is the only software package available for ferroelectric testers that provides exceptional freedom to design, conduct and review all procedures associated with any material experiment.**
- **Vision dramatically increases the productivity of the researcher, reducing the time required to acquire data in an experiment. Vision's enhanced productivity directly reduces cost of test. Vision dramatically increases the complexity of the research that may be accomplished by allowing researchers to combine different measurement tasks with environmental controls into an automated test procedure managed by programmable logic embedded with automated data collection, analysis and plotting tools.**

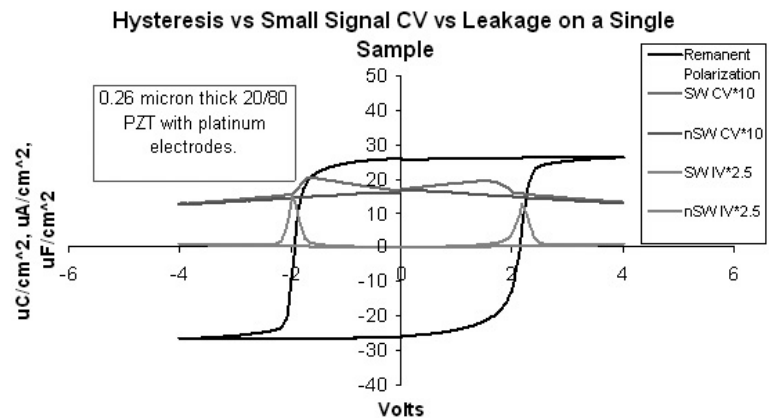



2835B Pan American Fwy NE  
Albuquerque, New Mexico 87107  
Tel: (505) 842-8007  
Fax: (505) 842-0366  
www.ferrodevices.com  
radiant@ferrodevices.com

**The Vision Task Library Includes, but is not limited to the following:**

- » Hysteresis, Leakage, Charge, Retain, Resist,
- » Fatigue, C(V), PUND, Imprint and Leakage Current
- » Link multiple tasks to create a custom program
- » Networking features allow researcher to share data from anywhere in the world
- » Continuously variable pulse widths and hysteresis periods

**Dimensions:**

- » Width-17" x Depth-13" x Height-4"
- » Weight 20lbs

**Hardware Specifications**

TESTER PARAMETER	MULTIFERROIC
Voltage Range (no external amp)	±10V, 30V, 100V, 200V, 500V
Voltage Range (w/external amp)	±10KV
Number of ADC Bits	18
Minimum Charge Resolution	0.8fC
Minimum Area Resolution (assuming 1 ADC bit = 1µC/cm2)	0.08µm <sup>2</sup> *
Maximum Charge Resolution	5.26mC
Maximum Area Resolution (assuming saturation polarization = 100µC/cm2)	52.6cm <sup>2</sup>
Max Charge Resolution w/HVI	526mC
Maximum Area Resolution (assuming saturation polarization = 100µC/cm2)	>100cm <sup>2</sup>
Max Hysteresis Frequency	250KHz*
Min Hysteresis Frequency	0.03Hz
Minimum Pulse Width	0.5µs
Minimum Pulse Rise Time (5V)	400ns
Max Pulse Width	1s
Max Delay between Pulses	40ks
Internal Clock	25ns
Minimum Leakage Current (assuming maximum current integration period = 20 seconds)	2pA - +/-3.5% accuracy 1pA- +/-15% accuracy
Maximum Small Signal Cap Freq.	1MHz
Minimum Small Signal Cap Freq	1Hz
Output Rise Time Control	105 scaling
Input Capacitance	~60fF
Electrometer Input	Yes

*\*Minimum Area under actual test conditions will be higher. 250KHz on 100 sq micron capacitor*